

SLOT DRAINS


Z888 Slot Drains

Polyethylene


~~Z888-4, Z888-6, Z888-8~~ Applications

- Residential
- Handicap Areas
- Running Tracks
- Pools
- Sports Facilities





Z888-4 Slot Drain



Z888-6 Slot Drain



Z888-8 Slot Drain

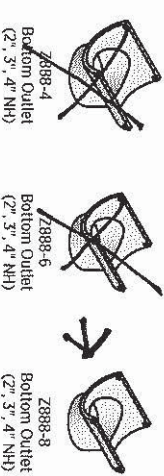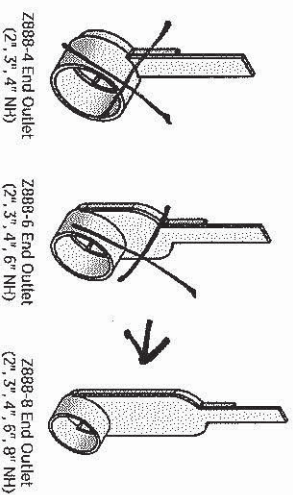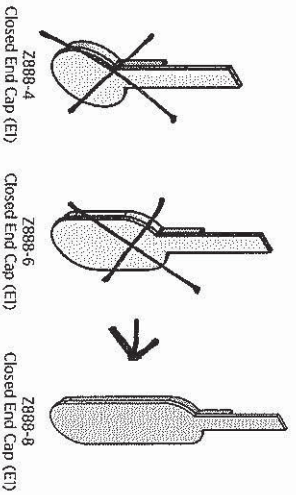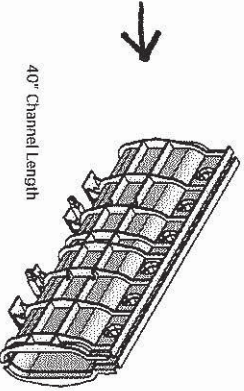


Engineering Specification


Slot drain shall be 40" long, Z888-4 (8" deep and 4" wide); Z888-6 (11-3/4" deep and 4" wide); or Z888-8 (17-5/8" deep and 4" wide) with 1/2" wide slot opening (ADA compliant). Drain shall be made of High Density Polyethylene (HDPE) and be UV-10 stabilized. Drain shall have rebar clips molded onto bedding level and/or bedding feet shall be used for positioning and anchoring purposes. Overlap connection shall be interlocked. For downloadable CSI format specification, visit www.zurn.com.

Installation Specification
Consult Plans and Specifications


~~Z888-4~~

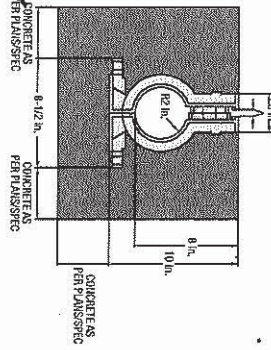

~~Z888-6~~


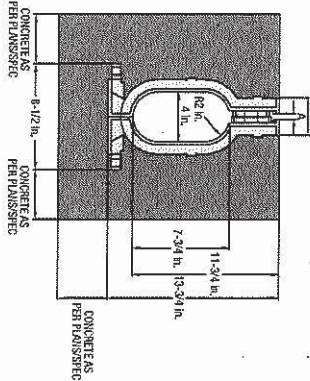


Z888-8

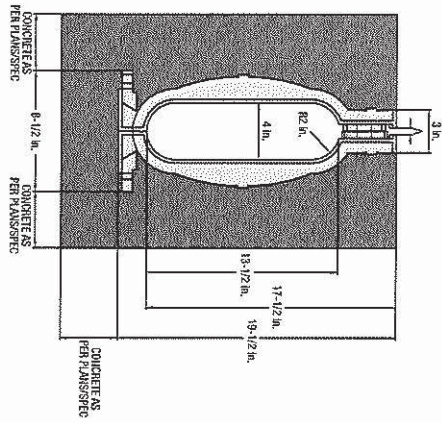


Features and Benefits

- 40" Pre-engineered Modular Sections – Allows quick and easy installation
- Variable Slot Opening – "A" Dimension (1/4" or 1/2")
- ADA Compliant – Heel-proof ductile iron frame
- Smooth High Density Polyethylene Structural Composite Interior – 0% water absorption.
- Interlocking Joints – Connect without the added time and expense of an external coupling
- Radius System Capability – For layout flexibility
- Heavy-Duty Frame Available – Carbon Steel, Galvanized, or Stainless Steel
- Built-in Rebar Clips – Accommodates #3 or #4 rebar (supplied by others)



Z888-4, Z888-6, Z888-8 System Paver Slot Options

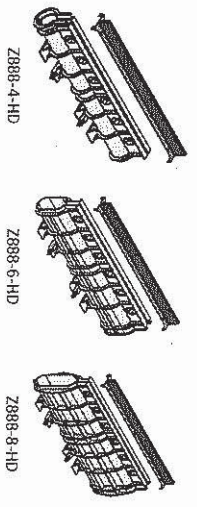

For downloadable CSI format specification, visit www.zurn.com.